

#### FEATURES & SPECIFICATIONS:

##### Construction

- Body is one-piece fiberglass reinforced polyester with an internal corrosion-resistant channel constructed of .04" pre-painted aluminum
- Housing includes eight stainless steel latches that provide a positive seal between the diffuser and gasket
- Mounting brackets
- 1/2" watertight aluminum hubs furnished standard, stainless steel optional

##### Optical system

- Standard lens is a high impact 100% DR acrylic diffuser with an internal crepe pattern allowing a smooth exterior surface for ease of cleaning
- The diffuser flange fits snugly into the gasketed retention slot forming a continuous tight seal

##### Electrical System

- Maximum output 13,544 lumens
- Industry leading 154 lumens per watt
- Operating temperature -40\* to 55\*C
- Mean Well driver operates at 120-277V, 50/60HZ
- Osram LED's CRI >80 at 4000K (Standard)

##### LISTINGS:

- UL/CUL Listed
- (UL 1598A) Marine/Indoor
- (UL 1598) Wet locations
- ABS Approved

##### APPLICATIONS:

- Hazardous locations where dust, dirt, corrosive & wet conditions are present
- Wastewater treatment plants
- Refrigerated areas
- Car washes
- Cold storage
- Canopies

##### OPTIONS:

- 3000K, 3500K & 5000K  
\*4000K Standard
- Emergency battery backup

##### SHIPPING WEIGHT:


- 11 lbs

# HFWL SERIES


## ORDERING INFORMATION

SERIES/LENGTH	LIGHT SOURCE	WATTAGE	VOLTAGE	OPTIONS
<b>HFWL4</b>	<b>L</b>	<b>**</b>	<b>U</b>	
HFWL4 = 4'	L = LED	20 = 25W (3,850 LUMENS) 30 = 35W (5,390 LUMENS) 40 = 45W (6,776 LUMENS) 50 = 55W (7,854 LUMENS) 60 = 60W (9,240 LUMENS) 70 = 70W (10,780 LUMENS) 80 = 80W (12,370 LUMENS) 90 = 88W (13,552 LUMENS)	U* = 120-277V 50/60HZ (Standard) 347V = 347 VOLT 480V = 480 VOLT	<b>OPTIONS</b> *4000K CCT STANDARD 30K = 3000K CCT 35K = 3500K CCT 50K = 5000K CCT SC4 = 4' SAFETY CABLE SSH = STAINLESS STEEL HUBS EM = EMERGENCY BATTERY PACK


## DIMENSIONS

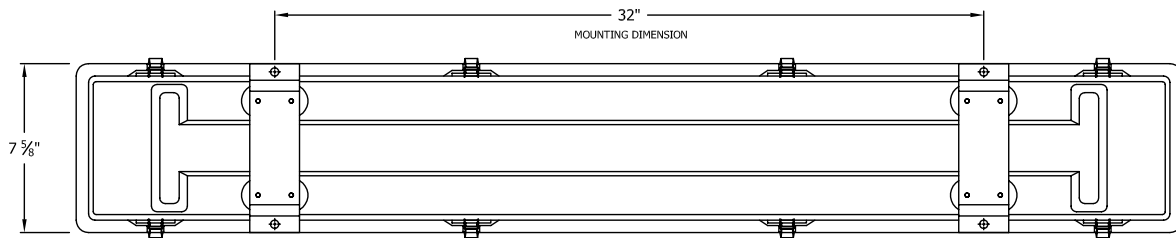

TOP VIEW



END VIEW

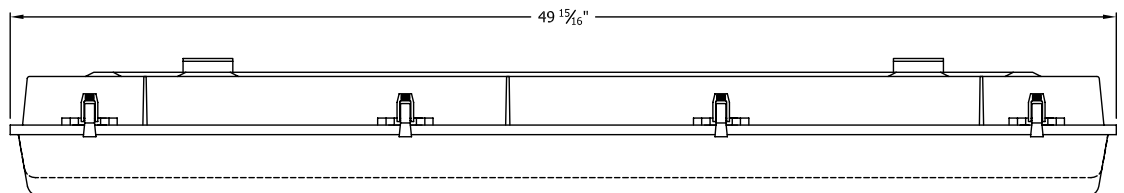

SIDE VIEW