



FEATURES & SPECIFICATIONS:

Construction

- Heavy-duty cast aluminum housing and door frame
- Plated steel yoke
- Positive spring-loaded door latches
- One-piece silicone gasket forms a water-tight seal between the door frame and housing
- Aluminum cord grip at conduit entry
- Standard finish natural aluminum

Optical System

- Heat and impact resistant tempered glass lens
- Aluminum reflector

Electrical System

- Ceramic spring-loaded sockets
- Double-ended lamp supplied standard

QFL SERIES

FLOODLIGHT

QUARTZ

LISTINGS:

- For use in wet locations, non-listed

APPLICATIONS:

- Industrial yards
- Heavy equipment
- Construction sites
- Outdoor storage
- Temporary Lighting
- Security
- Signage

OPTIONS:

- 4' Pre-wired cord

SHIPPING WEIGHT:


- 6 LBS

QFL SERIES FLUORESCENT

ORDERING INFORMATION (Please enter your information in the boxes provided below)

SERIES	WATTAGE	VOLTAGE	OPTIONS
QFL	500	120	-----
SERIES/LENGTH QFL	WATTAGE 30 = 300W 50 = 500W	VOLTAGE 120 = 120V 240 = 240V	OPTIONS S4 = 4' 16/3 SO CORD

DIMENSIONS

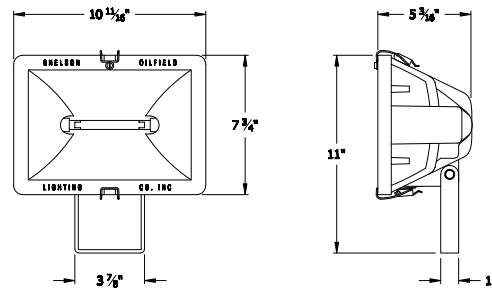

YOKE MOUNT