



FEATURES & SPECIFICATIONS:

Construction

- Vapor-tight incandescent fixture available in two sizes, VCI1 (150W) and VCI2 (300W) in wall, ceiling or pendant mount
- Heavy-duty die cast aluminum housing and guard
- Twist-lock guard with two set screws for secure fit
- Ceiling and wall mounted units include 4" die cast aluminum junction box with five threaded and plugged $\frac{3}{4}$ " conduit entry hubs, pendant mount includes a single $\frac{1}{2}$ " conduit entry
- Standard finish is light grey powder coat
- Globe and guard are supplied standard

Optical System

- Screw-in non-tempered glass globe for easy lamp access, optional tempered glass available

Electrical System

- Rated to 40°C, -18°C starting temperature
- Lamps are included

VCI SERIES INCANDESCENT VAPOR-TIGHT

LISTINGS:

- UL/CUL listed (UL 1598)
- Suitable for wet locations

APPLICATIONS:

- Non-hazardous areas where dust or moisture is present
- Factories
- Bridges
- Tunnels
- Corrosive environments
- Wastewater treatment plants
- Marine facilities
- Retail applications

OPTIONS:

- Tempered glass
- Frosted glass
- Wide arrange of colored glass lenses
- Straight reflector
- Angled reflector

SHIPPING WEIGHT:



- Small housing (150W)
- 4 LBS (Wall Mount)
- 3 LBS (Ceiling & Pendant Mount)

Large housing (300W)

- 5 LBS (Wall Mount)
- 4 LBS (Ceiling & Pendant Mount)

VCI VAPOR-TIGHT SERIES INCANDESCENT


ORDERING INFORMATION (Please enter your information in the boxes provided below)

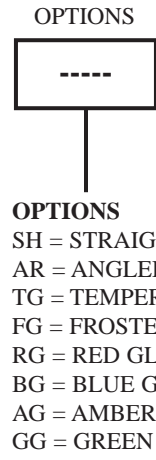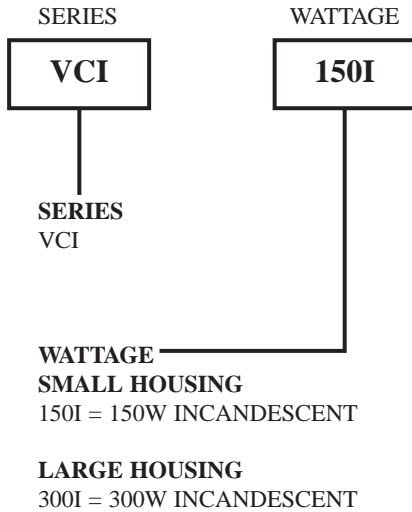

Note: Colored lenses are available in tempered glass. Add a "T" to the end of the designation above.



DIMENSIONS (SMALL HOUSING)

SMALL HOUSING 150I = 150W INCANDESCENT

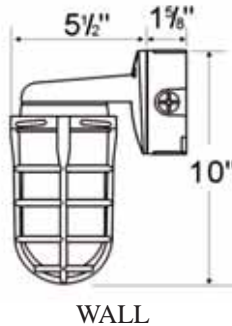

DIMENSIONS (LARGE HOUSING)

LARGE HOUSING 300I = 300W INCANDESCENT

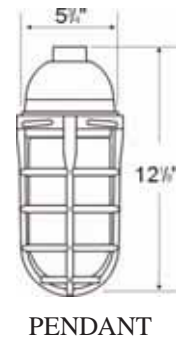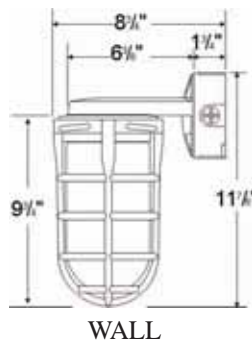

INDATECH LIGHTING
 5910 WEST BY NORTHWEST #100
 HOUSTON, TX 77040

www.indatechlighting.com

713-937-3600 Phone
 866-563-2832 Phone
 713-937-3604 Fax